


SPECIFICATION OF BSFxxxxSMSE SERIES

FEATURES

1. High performance (Isat) realized by metal dust core.
2. Low profile : Thickness with 2.0 to 7.0 mm for different size.
3. Low loss realized with low DCR.
4. Capable of corresponding high frequency (1MHz).
5. Halogen free, lead free, RoHS compliant.

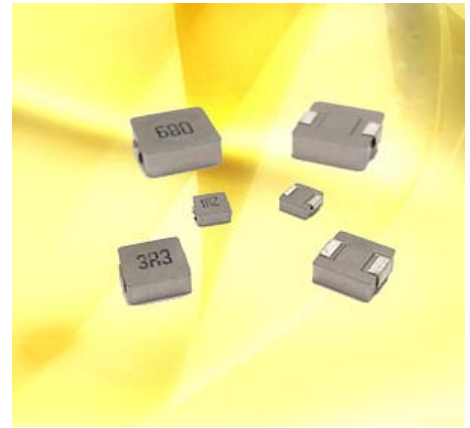

APPLICATIONS


DC/DC Converter for CPU in Notebook PC.
Thin type on-board power supply module for exchanger. VRM for server.
Graphic Card , DSC , Mobile Phone , LCD panel , LCD TV , HDD.

ORDERING CODE

BSF1265SMSE 1R5 M T
(1) (2) (3)(4)

- (1) PRODUCT TYPE CODE AND SIZE CODE
- (2) INDUCTANCE
- (3) INDUCTANCE TOLERANCE (M : ±20%, N : ±30%)
- (4) REEL TAPING

Unit: mm

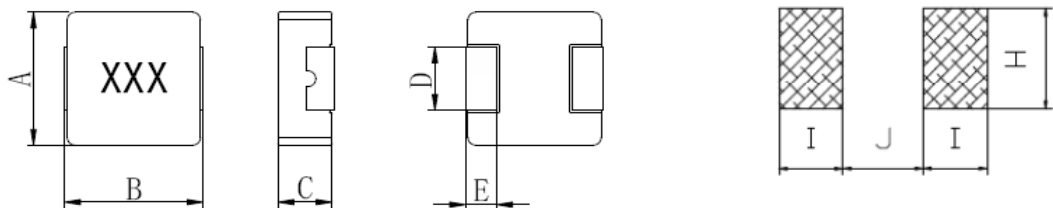

LAND PATTERN

SHAPE & DIMENSIONS

SIZE CODE	A mm	B mm	C max	D mm	E mm	H TYP	I TYP	J TYP		
BSF0402SMSE	4.20±0.25	4.40±0.35	1.8±0.2	2.0REF	0.8REF	2.5	1.5	2.2		
BSF0603SMSE	6.6±0.2	7.0±0.3	2.8±0.2	3.0REF	1.6REF	3.5	2.35	3.7		
BSF1004SMSE	10.0±0.3	11.5max	3.8±0.2	3.0REF	2.0REF	4.8	3.5	5.0		
BSF1265SMSE	12.6±0.3	13.45±0.35	6.5max	5.0REF	2.0REF	5.0	3.25	8.0		
BSF1770SMSE	17.15max	17.15±0.35	7.0max	12.0REF	2.5REF	12.19	3.17	11.68		

※All the data listed in this catalogue are for reference only, King Core reserves the right to alter or revise the specifications without prior notification.

