

SPECIFICATION OF BSFQ-□NR□ SERIES

AEC-Q200




FEATURES

1. SMT designed ferrite/alloy core with magnetic resin coating components for power circuits.
2. High magnetic shielding construction and acted high performance for EMC/EMI protection.
3. Low coil resistance with high current application.
4. Compatible with Pb-free RoHS and AEC-Q200.

APPLICATIONS

- 1 Automotive application

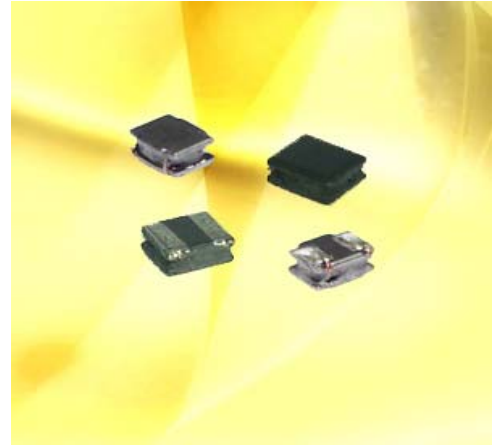

ORDERING CODE

BSFQ2010BNR□ 1R0 M T
 (1) (2) (3) (4)

- (1) PRODUCT TYPE CODE AND SIZE CODE
- (2) INDUCTANCE
- (3) INDUCTANCE TOLERANCE (M : ±20%, N : ±30%)
- (4) REEL TAPING

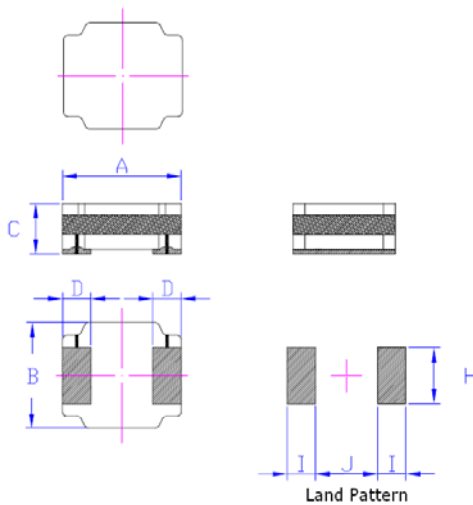


FIG 1

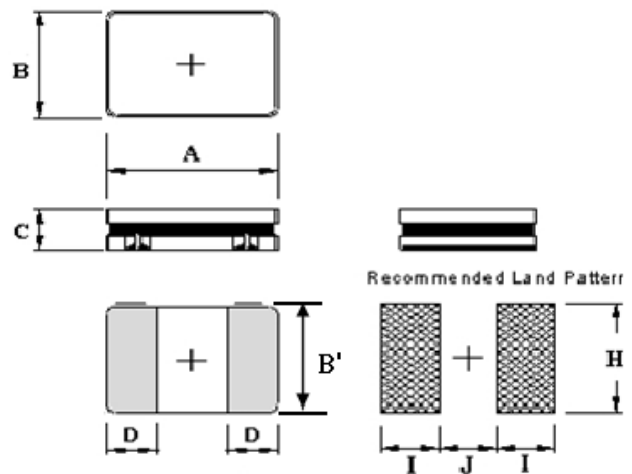


FIG 2

SHAPE & DIMENSIONS

UNIT:mm


SIZE CODE	A	B	B'	C	D	H	I	J	FIG
BSFQ2010BNRA	2.00±0.20	1.60±0.20	-	1.05max	0.60±0.20	1.10	1.00	0.90	1
BSFQ2510SNRA	2.50±0.25	2.10±0.20	2.25±0.20	1.00 max.	0.85±0.20	2.30	0.95	0.90	2
BSFQ2512SNRA	2.50±0.25	2.10±0.20	2.25±0.20	1.20 max.	0.85±0.20	2.30	0.95	0.90	2
BSFQ2512SNRB	2.50±0.25	2.10±0.20	2.25±0.20	1.20max	0.85±0.20	2.30	0.95	0.90	2

※All the data listed in this catalogue are for reference only, King Core reserves the right to alter or revise the specifications without prior notification.

SMD POWER INDUCTORS → BSFQ2010BNRA SERIES

ELECTRICAL CHARACTERISTIC

ORDERING CODE	Inductance (μH)	DC Resistance (mΩ)max	SRF(MHz) min	Isat (A)max	IDC (A)max
BSFQ2010BNRAR47MT	0.47	62	170	2.30	2.20
BSFQ2010BNRAR68MT	0.68	80	140	2.00	1.80
BSFQ2010BNRA1R0MT	1.00	96	110	1.80	1.70
BSFQ2010BNRA1R5MT	1.50	150	95	1.40	1.40
BSFQ2010BNRA1R8MT	1.80	175	70	1.20	1.20
BSFQ2010BNRA2R2MT	2.20	210	70	1.10	1.10
BSFQ2010BNRA3R3MT	3.30	300	55	0.95	1.00
BSFQ2010BNRA4R7MT	4.70	384	45	0.76	0.85
BSFQ2010BNRA6R8MT	6.80	770	35	0.66	0.67
BSFQ2010BNRA8R2MT	8.20	840	30	0.63	0.65
BSFQ2010BNRA100MT	10.00	950	30	0.60	0.65
BSFQ2010BNRA150MT	15.00	1600	25	0.45	0.40

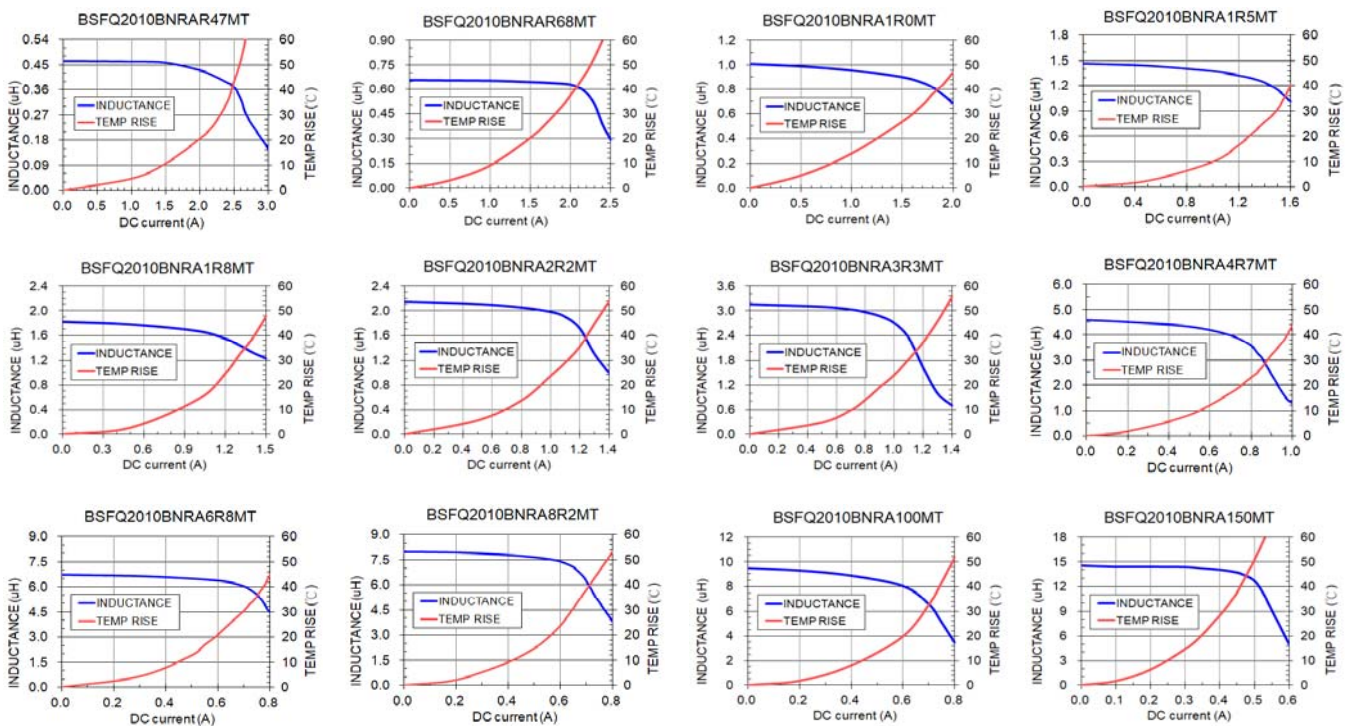

※Test Frequency: 1MHz/0.1V

※Tolerance: M±20%

※Isat: Based on Inductance decrease 30%

※IDC: Based on Temperature increase 40°C

※Operating temperature range : -40 to +125°C (including self-heating)

※Storage Temp. : -40°C TO+85°C

※All the data listed in this catalogue are for reference only, King Core reserves the right to alter or revise the specifications without prior notification.