

SPECIFICATION OF WCM-SCMSO, SCMESO SERIES


FEATURES

1. Low DCR and excellent impedance characteristics.
2. High rated current.
3. Excellent common mode EMI noise suppression.
4. Virtually no distortion of signals.



APPLICATIONS

1. EMI suppression for power line, AC/DC adaptor, larger electronic equipment, personal computers, peripherals, IoT etc.

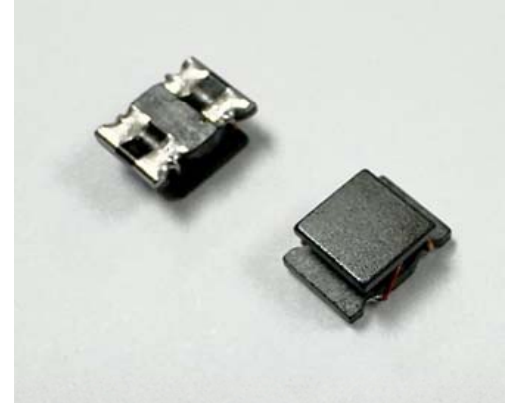


ORDERING CODE


WCM - 5025 SCMESO - 501 I
 (1) (2) (3) (4) (5)

- (1) PRODUCT TYPE CODE
- (2) PRODUCT SIZE CODE
- (3) DESIGN CODE
- (4) IMPEDANCE
- (5) REEL TAPING




ELECTRICAL SCHEMATIC






PAD LAYOUT



WCM-SCMSO



WCM-SCMESO



SHAPE & DIMENSIONS

UNIT:mm






SIZE CODE	A ±0.30	B ±0.30	C ±0.15	D Ref.	E Ref.	F Ref.	G Ref.	a	b	c	d
WCM-5025SCMSO	3.60	5.00	2.35	1.25	1.70	1.60	1.00	1.80	2.40	1.20	0.80
WCM-5025SCMESO	3.60	5.00	2.35	1.25	1.70	1.60	1.00	1.80	2.40	1.20	0.80

※All the data listed in this catalogue are for reference only, King Core reserves the right to alter or revise the specifications without prior notification.

COMMON MODE CHOKE → WCM-5025SCMESO SERIES

ELECTRICAL CHARACTERISTIC

ORDERING CODE	Impedance	Impedance	DC Resistance	IDC	Rated Voltage	Withstand Voltage	Insulation Resistance
	(Ω)min.	(Ω)Typ	(Ω)	(A)	(V)	(V)	(M Ω)
	10MHz	100MHz	max.	Typ.	max.	max.	min.
WCM-5025SCMESO-500T	4.6	50	0.013	6.0	50	125	10
WCM-5025SCMESO-151T	11	150	0.020	5.0	50	125	10
WCM-5025SCMESO-331T	20	330	0.027	4.0	50	125	10
WCM-5025SCMESO-501T	35	500	0.034	2.5	50	125	10
WCM-5025SCMESO-112T	50	1100	0.056	2.0	50	125	10

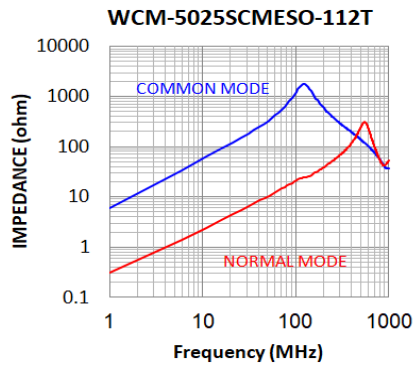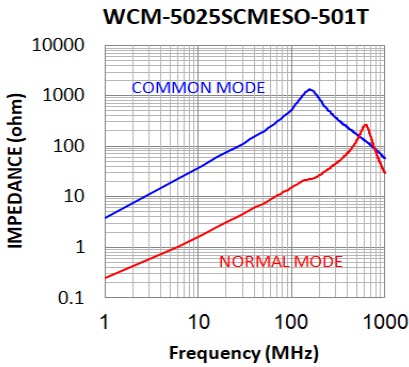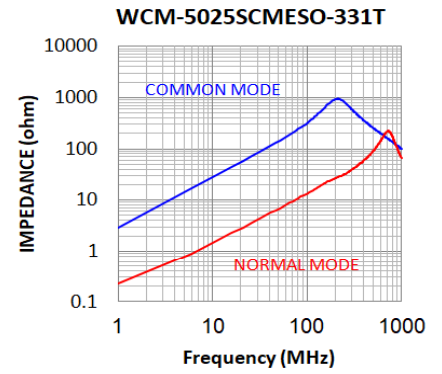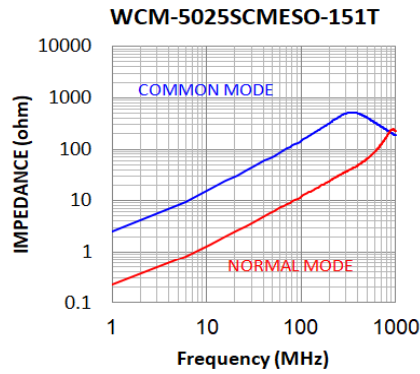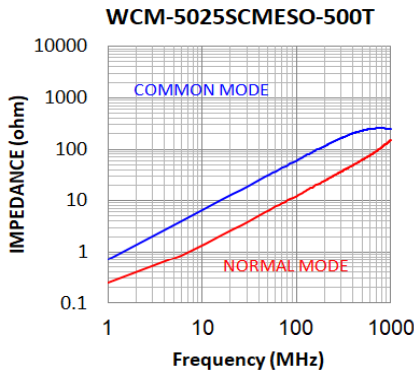

※IDC: Based on Temperature increase 40°C Typ.

※Operating temperature range : -40 to +125°C

※All the data listed in this catalogue are for reference only, King Core reserves the right to alter or revise the specifications without prior notification.