

# SPECIFICATION OF WCM-□□□□SRFSO SERIES

## FEATURES

1. Low DCR, high rated current and excellent impedance characteristics.
2. Magnetically shielded.
3. Excellent common mode EMI noise suppression.
4. Virtually no distortion of signals.



## APPLICATIONS


1. EMI suppression for power line , AC/DC adaptor, larger electronic equipment, personal computers, peripherals, IoT etc.




## ORDERING CODE

WCM - 5040 SRFSO - 501 T  
 (1) (2) (3) (4) (5)


- (1) PRODUCT TYPE CODE
- (2) PRODUCT SIZE CODE
- (3) DESIGN CODE
- (4) IMPEDANCE
- (5) REEL TAPING

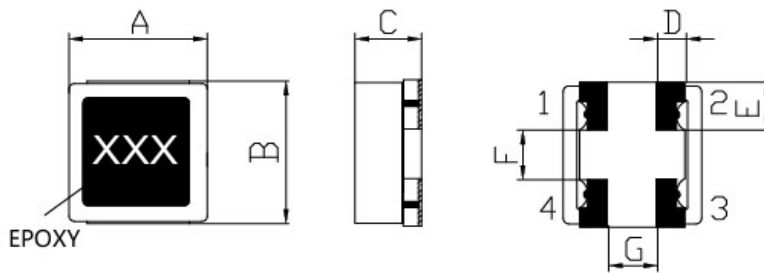

## ELECTRICAL SCHEMATIC



## PAD LAYOUT



## SHAPE & DIMENSIONS

UNIT:mm






SIZE CODE	A ±0.30	B ±0.30	C max.	D Ref.	E Ref.	F Ref.	G Ref.	a	b	c	d
WCM-5025SRFSO	4.80	5.00	2.50	1.25	1.70	1.60	1.00	1.80	2.40	1.20	0.80
WCM-5040SRFSO	4.80	5.00	4.50	1.15	1.50	2.00	1.00	1.60	2.30	1.00	0.80

※All the data listed in this catalogue are for reference only, King Core reserves the right to alter or revise the specifications without prior notification.

# COMMON MODE CHOKE → WCM-5025SRFSO SERIES

## ELECTRICAL CHARACTERISTIC

ORDERING CODE	Impedance	DC Resistance	IDC	Rated Voltage	Withstand Voltage	Insulation Resistance
	( $\Omega$ )Typ	( $\Omega$ )	(A)	(V)	(V)	(M $\Omega$ )
	100MHz	$\pm 40\%$	Typ.	max.	max.	min.
WCM-5025SRFSO-101T	100	0.009	6.5	50	125	10
WCM-5025SRFSO-251T	250	0.014	5.0	50	125	10
WCM-5025SRFSO-501T	500	0.019	4.0	50	125	10
WCM-5025SRFSO-102T	1000	0.024	2.0	50	125	10
WCM-5025SRFSO-142T	1400	0.040	1.5	50	125	10

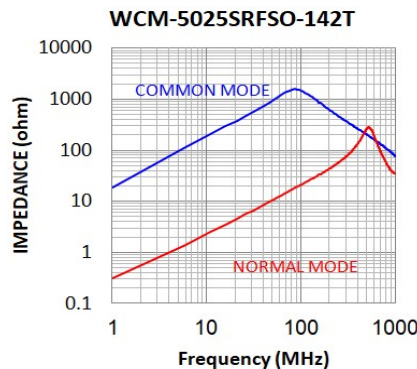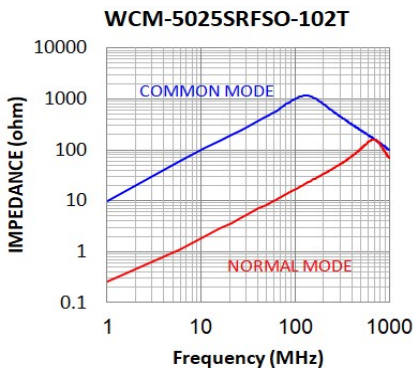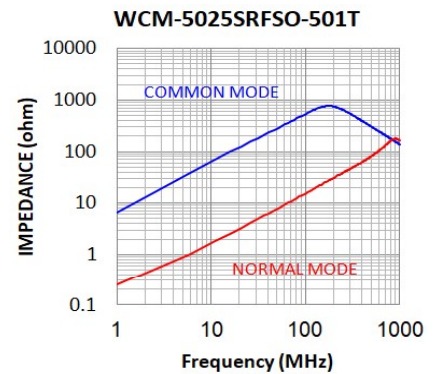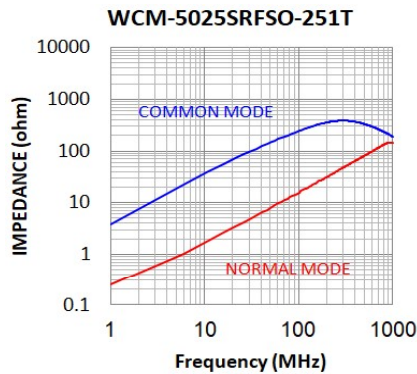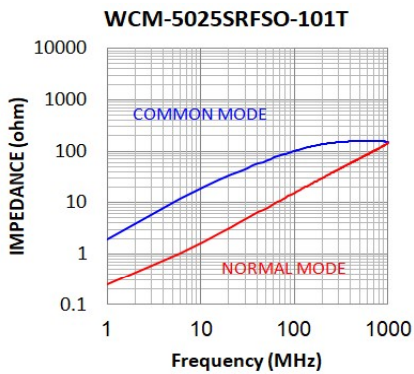

※IDC: Based on Temperature increase 40°C Typ.





※Operating temperature range : -40 to +125°C

※All the data listed in this catalogue are for reference only, King Core reserves the right to alter or revise the specifications without prior notification.

# COMMON MODE CHOKE → WCM-5040SRFSO SERIES

## ELECTRICAL CHARACTERISTIC

ORDERING CODE	Impedance	DC Resistance	IDC	Rated Voltage	Insulation Resistance	
	( $\Omega$ )Typ	( $\Omega$ )	(A)	(V)	(M $\Omega$ )	
	100MHz	max.	Typ.	max.	min.	
WCM-5040SRFSO-191T	190	0.02	5.0	250	10	
WCM-5040SRFSO-351T	350	0.04	2.0	250	10	
WCM-5040SRFSO-102T	1000	0.06	1.5	250	10	
WCM-5040SRFSO-152T	1500	0.10	1.0	250	10	

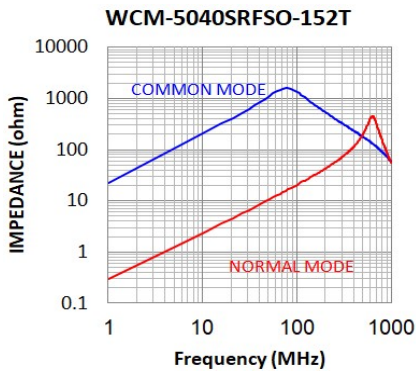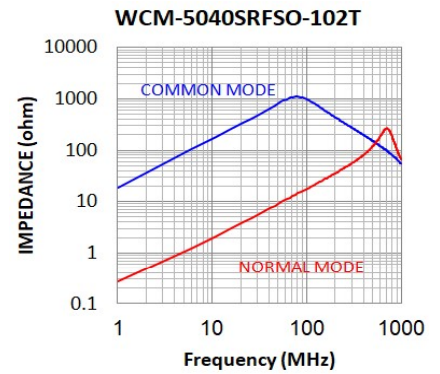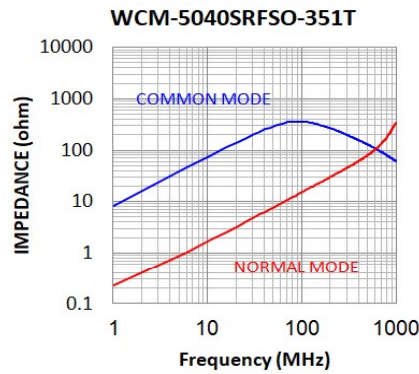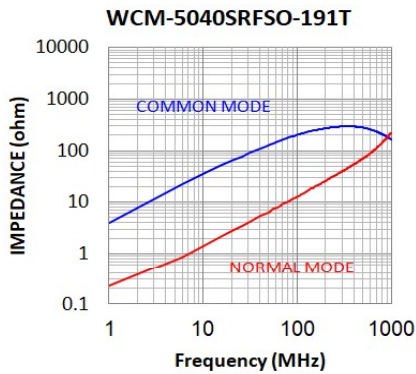

※IDC:Based on Temperature increase 40°C Typ.

※Operating temperature range : -40 to +125°C

※All the data listed in this catalogue are for reference only, King Core reserves the right to alter or revise the specifications without prior notification.