

SPECIFICATION OF BSFQ□□□BNRM SERIES

AEC-Q200




FEATURES

1. SMT designed ferrite/alloy core with magnetic resin coating components for power circuits.
2. High magnetic shielding construction and acted high performance for EMC/EMI protection.
3. Low coil resistance with high current application.
4. Compatible with Pb-free RoHS and AEC-Q200.



APPLICATIONS

- 1 Automotive application

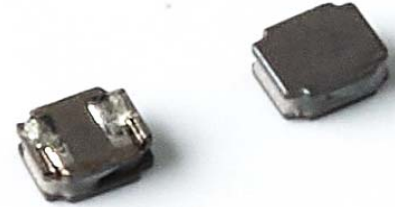

ORDERING CODE

BSFQ2512BNRM 1R0 M T

(1) (2) (3)(4)

- (1) PRODUCT TYPE CODE AND SIZE CODE
- (2) INDUCTANCE
- (3) INDUCTANCE TOLERANCE (M : ±20%, N : ±30%)
- (4) REEL TAPING

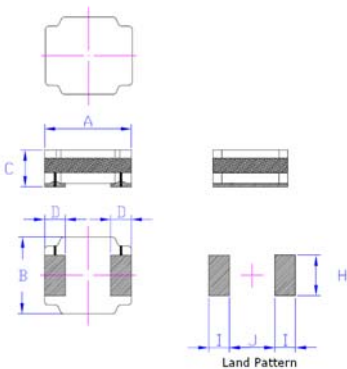


FIG 1

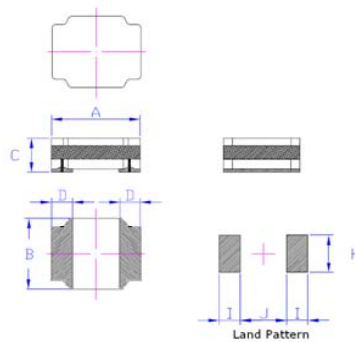


FIG 2

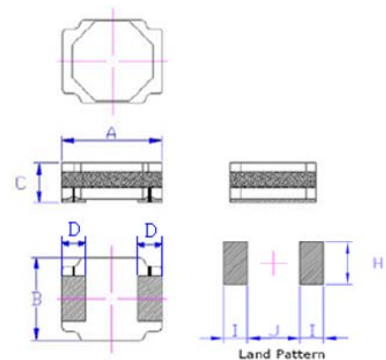


FIG 3

SHAPE & DIMENSIONS

UNIT:mm

SIZE CODE	A mm	B mm	C mm	D mm	H	I	J	FIG				
BSFQ2010BNRM	2.0±0.2	1.6±0.2	1.05max	0.6±0.2	1.10	1.00	0.90	1				
BSFQ2512BNRM	2.5±0.2	2.1±0.2	1.25max	0.85±0.20	1.40	0.95	0.90	1				
BSFQ3015BNRM	3.0±0.2	3.0±0.2	1.55max	0.9±0.2	2.90	1.00	1.20	2				
BSFQ6030BNRM	6.0±0.2	6.0±0.2	3.0±0.2	1.9±0.3	5.70	2.00	2.00	3				
BSFQ6030BNRMX	6.0±0.2	6.0±0.2	3.0±0.2	1.9±0.3	5.70	2.00	2.00	1				

※All the data listed in this catalogue are for reference only, King Core reserves the right to alter or revise the specifications without prior notification.















KING CORE ELECTRONICS INC.
Tel:886-3-4698855 Fax:886-3-4691395

No.269,Nanfong Rd.,Pingjhen City,Taoyuan County, Taiwan
E-mail:kc@mail.kingcore.com.tw Web Site:http://www.kingcore.com.tw

SMD POWER INDUCTORS → BSFQ2512BNRM SERIES

ELECTRICAL CHARACTERISTIC

ORDERING CODE	Inductance (μH)	DC Resistance (mΩ)max	SRF(MHz) min	Isat (A)max	IDC (A)max
BSFQ2512BNRMR33MT	0.33	28	85	5.70	3.80
BSFQ2512BNRMR47MT	0.47	34	80	4.50	3.60
BSFQ2512BNRMR68MT	0.68	43	70	4.10	3.60
BSFQ2512BNRM1R0MT	1.00	55	55	3.50	3.20
BSFQ2512BNRM1R5MT	1.50	70	40	2.70	2.50
BSFQ2512BNRM2R2MT	2.20	95	35	2.30	2.10
BSFQ2512BNRM3R3MT	3.30	150	25	1.70	1.70
BSFQ2512BNRM4R7MT	4.70	230	20	1.40	1.40
BSFQ2512BNRM6R8MT	6.80	350	15	1.30	1.20
BSFQ2512BNRM100MT	10.00	450	15	1.00	1.00
BSFQ2512BNRM150MT	15.00	620	10	0.80	0.70
BSFQ2512BNRM220MT	22.00	790	7	0.65	0.65

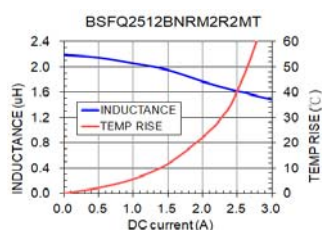

※Test Frequency: 1MHz/0.1V

※Tolerance: M±20%

※Isat: Based on Inductance decrease 30%

※IDC: Based on Temperature increase 40°C

※Operating temperature range : -40 to +125°C (including self-heating)

※Storage Temp. : -40°C TO+85°C

※All the data listed in this catalogue are for reference only, King Core reserves the right to alter or revise the specifications without prior notification.